

Haptic-Assisted Guidance System for Navigating Volumetric Data Sets

Erick Méndez*, Shunsuke Yoshida†, Haruo Noma†, Robert W. Lindeman*†,
Yasuyuki Yanagida†, Shinobu Masaki‡, Kenichi Hosaka†
(*)Computer Science Department, George Washington University, Washington DC, USA
(†)Media Information Science Laboratories ATR, Kyoto, Japan
(‡)Brain Activity Imaging Center ATR, Kyoto, Japan
Email: {mendex|gogo}@gwu.edu, {shun|noma|yanagida|masaki|hosaka}@atr.jp

Abstract

In this paper, a new approach for navigation assistance through sets of volumetric data is presented. This innovative method uses force feedback in two dimensions to guide the user to a region of interest. The haptic feedback is calculated under two methods and we explain the implementation of both approaches. The output is displayed by the Proactive Desk, a two dimensional force feedback device developed at the Advanced Telecommunications Research Institute. This new approach is targeted to scientists who work with sets of volumetric data and who wish to find information using visual scanning enhanced with haptics. Our system is designed for Magnetic Resonance Images (MRI) overlaid with functional MRI.

1. Introduction

Visualization of data has always been an important subject in the representation of information. With the visualization of fluid dynamics, texture, and medical images, the field has broadened within the computational era. In addition to the representation of the data, localization of specific data is a problem itself. In three-dimensional representations, occlusion is a common problem. This problem occurs when two or more objects overlap in the line of sight of the user, and the closest object occludes those farther away.

The use of Magnetic Resonance Imaging (MRI) and Functional MRI (fMRI) has increased over the past decade. fMRI is used to locate regions where activity of the brain is detected. These regions are of high interest to researchers and are a common subject of study. An example of the problem of occlusion is shown in Figure 1. As seen in the figure, brain tissue is

occluded by the overlapping of the fMRI. It is our intention to provide new ways of localizing information than by only providing visual cues.

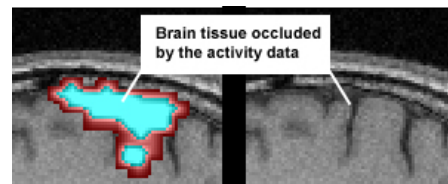


Figure 1: An example of the problem of occlusion of fMRI data overlaid on an MRI scan.

In our current work, a new approach for navigation is presented. Our research is focused on the task of finding regions of interest over sets of volumetric data. The solution presented uses force feedback to guide the user's hand towards the region of interest. The device for the display of force feedback that we use is the Proactive Desk (PD) by Noma *et al.* [6]. Two methods for haptic rendering were developed and we will explain the implementation of these in the following sections.

2. Related Work

Several approaches for volumetric representation by haptics (haptization) have been developed. The first method for haptization of volumetric data was introduced by Iwata and Noma [5]. Subjects were given the task of finding regions of "high density data" by providing them with visual and haptic feedback. Results showed in this task that haptic feedback increased the accuracy of the subjects. In the study by Iwata and Noma, the user was always presented with visual information. No haptic guidance assistance was provided.

More recently Ikits *et al.*, from the University of Utah, introduced an algorithm that restricts the motion of a proxy in certain directions when working on volumetric data [4]. The goal of this research was to help the user to explore the volume. However, no work was done in guiding the user towards specific data.

Reimersdahl *et al.* introduced rendering techniques for the exploration of Computational Fluid Dynamics data in virtual environments [8]. In this work a similar approach to one of our haptic rendering methods was used. In their gravity scalars method, points in the data grid are assigned a mass. This will attract the probe object to those regions of high density; however, this work uses a different haptic device, a PHANTOM.

Linear trajectories for paths from outside the head to a target inside the brain were implemented by Hinckley *et al.* [3]. Here the user holds a prop that acts as the cutting plane of the data set, however, no active haptic feedback is given to the user. Moreover, no guidance assistance is provided.

At the University of Delft, Haan *et al.*, created another approach for volume exploration employing passive feedback using a pad and a stylus [2]. This work is a good approach for volume slicing. In their research, however, the user tries to get an insight of the data by inspecting or probing the various data values. They do not provide any active force feedback for navigation.

None of these researchs have worked on the task of finding information by navigation assistance.

3. The Haptic Feedback Device

The Proactive Desk [6] is a force feedback device that works by applying forces to electro-conductive objects over its surface, the desk. A projector, placed above this desk, is used to display images on its surface. This image is presented in the center of the desk. The rest of the surface is used to support non-haptic interface widgets. Our system uses a stylus for the navigation aid. This stylus sits on top of the PD's surface and it will move according to the forces applied by the PD.

4. Guidance System

We present a solution to the problem of localizing data by using, as an example, overlapped fMRI data. We define our Regions of Interest (ROI) as those regions where activity was detected by the fMRI. Our research presents the implementation of a system capable of guiding the user towards the ROI depending on the distance to the region, or the distance and density of the target region. This system uses haptic

feedback to push the user towards the desired direction. We calculate vectors that will provide us with the amount of force and direction necessary to guide the user.

The force vectors are pre-computed and stored in a Force Vector Mesh (FVM). The system recognizes the two-dimensional position of the stylus and maps it to the three-dimensional volume. Once knowing this position, the system only performs a lookup in the stored FVM. With the resulting force vector, the PD can now guide the user in the necessary direction.

Our system is capable of slicing the volume in any arbitrary position and orientation. Four planes are provided for this task: three orthogonal, axis-aligned planes, and one of arbitrary position and orientation. Any of the four may be chosen for navigation.

4.1. System Overview

An image of the system we have developed is presented in the Figure 2. The center image is where the force vectors will be applied. While the user has the stylus in this area, he will be able to feel the PD guiding him towards the desired direction.

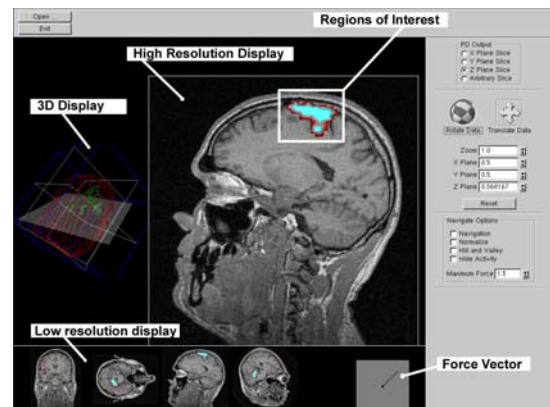


Figure 2: An example of how the system looks. We highlight the main tools provided to the user.

As seen in the figure, we present a high-resolution, 512x512 pixel area in the center of the workspace. This is where the main display of information occurs, and this is also the area of effect of the PD.

On the left-hand side of the PD, a three-dimensional representation of the MRI and fMRI data is presented as a wire frame. The orthogonal cutting planes are shown in gray. The arbitrary cutting plane is shown as the gray semi-transparent floor.

Manipulations of the wire frame such as rotations or translations are done by a trackball. The user can

reorient the data by moving the sphere of the device. By doing this, the arbitrary plane that acts as a floor will cut the data in different orientations. The system provides widgets for these tasks that can be accessed by the stylus. The trackball is intended as a gross manipulation method by the non-dominant hand of the user. Finer manipulation, in this case guidance, will be provided to the dominant hand while the user holds the stylus. This follows the two-handed interaction work defined by Guiard [1].

It is our goal to guide the user to the ROI even if this is not visible. The user, therefore, can hide the fMRI data. The user is also capable of turning on and off the navigation aid. The system shows a low-resolution display of the three orthogonal and the arbitrary slices, as can be seen on the bottom of the Figure 3. The user is also presented with a glyph of the force vector that is currently applied to the stylus.

The MRI and fMRI data were provided in DICOM format. The fMRI was scanned while giving visual stimuli to the subject. There were 191 images of every set, each at a 256x256 resolution. The result was volume size of 191x256x256 cubic voxels. These dimensions correspond to the three volumes, the base MRI, the fMRI and the FVM.

5. Haptic Rendering Methods

The FVM can be generated under various methods. Next, we present the two developed under our current implementation. Each FVM was generated offline and saved to a file, since both methods require considerable computational power. Every position on the FVM will hold a three-dimensional force vector. This force vector will be used to guide the stylus towards the region of interest.

We consider a ROI as a group of Points of Interest (POI). Each POI corresponds to one voxel in the fMRI volume. Both methods use an inverse distance function to modify the magnitude of the force. The magnitude of the resulting force vector needs to be mapped to an amount of force that the PD can apply. We use a linear mapping to normalize the maximum force in the FVM to the maximum force the PD can generate.

5.1. Inverse Distance Function

The inverse distance function on every method was calculated by the following formula:

$$g(x) = \frac{1}{x^2}$$

By using this function, we ensure that the closer the voxel to the POI, the stronger the force of attraction will be.

5.2. Closest Point Method

This method calculates each force vector by taking the POI closest to the voxel and calculating a vector between these two. To determine the proximity, we use the geometric distance. Once choosing the vector, the magnitude will be modified to be equal to the normalized vector times the inverse distance function described earlier. This method can also be defined with the following formula:

$$\vec{F} = g(d) \cdot \frac{\vec{A}}{d}$$

where

$$\vec{A} = \{\min(\|\vec{V}\|) \mid \vec{V} = P_i - P; i = 0..n\}$$

$$d = \|\vec{A}\|$$

In this formula, F is the force vector, $g(x)$ is the inverse distance function described earlier. P_i the i th point of interest; P the current voxel at which we want to calculate the force vector, A is the vector with the minimum magnitude of all the vectors from P to the point of interest P_i , and d is the magnitude of A . The value n is the number of points of interest. In this method we assume all the points to have the same intensity, we use this as the analogous of mass.

5.3. Sum of Attractions Method

The second method we provide is the Sum of Attractions. This method creates an FVM in which each vector is generated by the following formula:

$$\vec{F} = \sum_i^n I_i \cdot g(d_i) \cdot \frac{\vec{V}_i}{d_i}$$

where

$$\vec{V}_i = P_i - P$$

$$d_i = \|P_i - P\|$$

F is the force vector we are calculating; I_i the intensity at point i . P_i the i th point of interest; P the current voxel at which we want to calculate the force vector, and d_i is the distance between the two points, V_i is the vector between P_i and P , $g(x)$ is the distance function described earlier. Again, the value n is the number of points of interest.

The resulting vector will be determined by the summation of the normalized vector formed by the

current voxel and every POI, times the distance function evaluated on the magnitude of this vector before normalization, times the intensity of the point. Notice that this method is similar to a gravity model. The intensity of the point is analogous to the mass of the point.

6. Problems with the Current System

The generation of the FVM is a computationally expensive task, which is why it has to be pre-computed. For this reason, our system cannot handle dynamic changes in the data. Also, since our solution works on discrete space representing constant information, it is prone to aliasing artifacts.

Another important issue is the direction of the ROI when it lies on a parallel plane above or below the displayed plane in the data set. We are able to compute the direction to which the plane should be moved, however, an automatic option should be implemented. Two solutions are in progress right now. One solution will provide feedback to the user of "climbing up a hill" when the plane is somewhere in the data stack "above" the displayed plane, and "climbing down a valley" when the plane is "below." These types of haptic feedback have already been tested on the PD [9]. Another approach to solving this problem is by automatically moving the current plane towards the desired direction. Both of these solutions have straightforward implementations, however, the authors have decided to leave this as a future work.

7. Summary and Future Work

We have presented a technique for navigation on large sets of volumetric data using haptic feedback. Our approach provides a two-dimensional solution for the exploration of three dimensional data sets by using the Proactive Desk haptic feedback device.

To conduct subject studies to prove the usability of our system is an obvious next step. The first study in mind is to test the advantages of guiding the user over a flat surface towards a defined target. In this test we will also compare the two methods we used to create the FVM. Analysis of the results of these studies will help us confirm whether our system provides a significant aid to the problem of localizing information. More techniques for generating the FVM will be researched in the next version of the project.

Our current system provides a way of guiding the user to a ROI, however, no discussion was presented on haptically displaying these regions once reached. There are many approaches in solving this problem, such as that of Noma and Iwata [7]. We can implement

other well-known techniques once our guidance approach is validated.

8. Acknowledgements

This research was supported in part by the National Institute of Information and Communications Technology.

References

- [1] Guiard Y., "Asymmetric Division of Labor in Human Skilled Bimanual Action: The Kinematic Chain as a Model," *Journal of Motor Behaviour*, 19(4):486-517
- [2] Haan G. de, Koutek M., Post F. H., "Towards Intuitive Exploration Tools for Data Visualization in VR", In *Proceedings of the ACM symposium in Virtual Reality Software and Technology*, 2002, pp. 105-112
- [3] Hinckley K., Pausch R., Goble J. C., Kassel N. F., "Passive Real-World Interface Props for Neurosurgical Visualization, " In Gavriel Salvendy, editor, *Proceedings of ACM CHI'94 Conference on Human Factors in Computing Systems*, 1994, pp. 452-458
- [4] Ikits M., Brederson J. D., Hansen C. D., Johnson C. R., "A Constraint-Based Technique for Haptic Volume Exploration," In *Visualization 2003*, 2003, pp. 263-269
- [5] Iwata H. and Noma H., "Volume Haptization", In *Proceedings IEEE Virtual Reality Annual International Symposium*, 1993 pp. 16-23
- [6] Noma H., Yoshida S., Yanagida Y., Tetsutani N., "The Proactive Desk : A New Force Display System for a Digital Desk Using a 2-DOF Linear Induction Motor", In *Presence: Teleoperators & Virtual Environments*, April 2004, vol. 13, no. 2, pp. 146-163
- [7] Noma H and Iwata H., "Presentation of Multiple Dimensional data by 6.D.O.F. force display", In *Proceedings of IEEE/RSJ International Conference on Intelligent Robots and Systems*, 1993, pp. 1495-1499
- [8] Reimersdahl T. van, Bley F., Kuhlen T., Bischof C.H., "Haptic Rendering Techniques for the Interactive Exploration of CFD Datasets in Virtual Environments", In *Proceedings of the Workshop on Virtual Environments*, 2003, pp. 241-246
- [9] Yoshida S., Kurumisawa J. Noma H., Tetsutani N., Hosaka K., "Sumi-Nagashi: Creation of New Style Media Art with Haptic Digital Colors", *ACM Multimedia 2004*, 2004.10, pp.636-643